
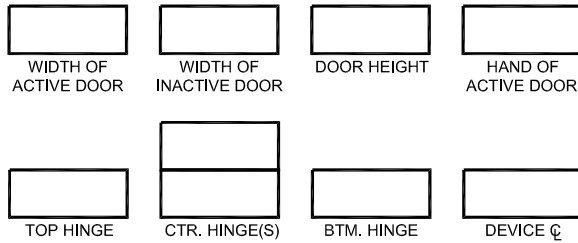


TIGER SERIES

- COMMERCIAL DUTY
- HEAVY DUTY
- EXTREME DUTY
- FIRE RATED
- 20 MIN ____ 30 MIN ____ 45 MIN ____
60 MIN ____ 90 MIN ____
- WIND LOAD RATED
DESIGN PRESSURE ____ PSF
- BLAST LOAD RATED
DESIGN PRESSURE ____ PSF

COLOR

- POLAR WHITE
- CASHEW TAN
- MIST GRAY
- PRIMER
- OTHER _____

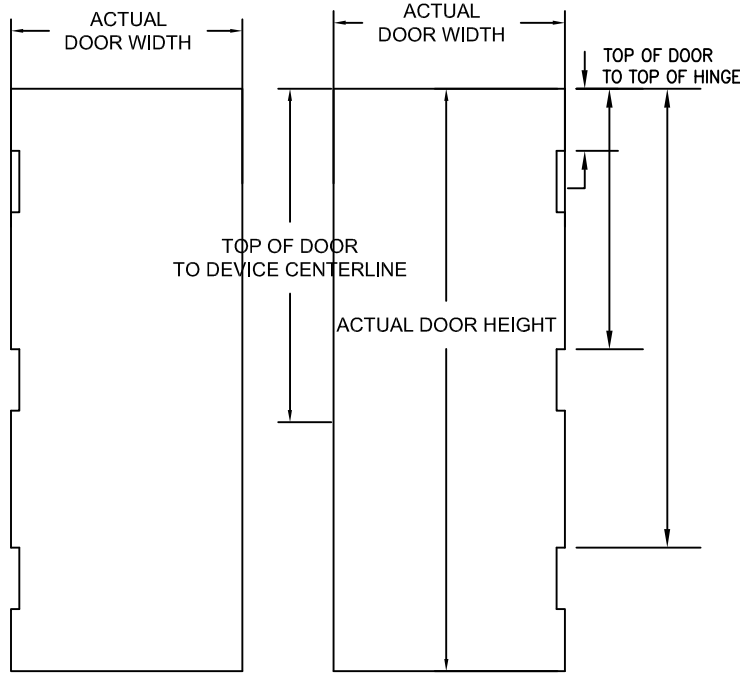


PLEASE ALLOW MINIMUM 1/8" GAP AT HINGE EDGES AND MEETING STILE

HARDWARE PREPARATIONS

- 4-1/2" MORTISE HINGES
 3 4 5
- 5" MORTISE HINGES
 3 4 5
- CONTINUOUS HINGE *
- CYLINDRICAL 161 LOCK
- CYLINDRICAL DEADBOLT
- MORTISE DEADLOCK *
- MORTISE 86 LOCK
- MORTISE EXIT DEVICE
- RIM EXIT DEVICE
- SVR EXIT DEVICE
- CVR EXIT DEVICE *
- CLOSER
- PUSH/PULL PLATES
- SURFACE OH HOLDER/STOP
- CONCEALED OH HOLDER/STOP *
- SURFACE DOOR BOTTOM
- CONCEALED DOOR BOTTOM *
- MANUAL FLUSH BOLTS
- AUTOMATIC FLUSH BOLTS *
(wood type for UL rated)
- FRP ASTRAGAL
Installed on INA leaf STD
- OTHER *

*MAKE & MODEL REQUIRED



STANDARD 1/4" GLASS SIZES:

- 8 x 30 (6-1/2 x 28-1/2 VISIBLE)
- 12 x 12 (10-1/2 x 10-1/2 VISIBLE)
- 24 x 24 (22-1/2 x 22-1/2 VISIBLE)
- 24 x 30 (22-1/2 x 28-1/2 VISIBLE)

GLAZING TYPE AND THICKNESS:

- 1/4" TEMPERED
- 1/4" WIRE
- 1/4" LEXAN
- CUTOUT ONLY (NO KIT)
- OTHER _____



CUSTOM SIZES:

- VISIBLE WIDTH _____
- VISIBLE HEIGHT _____
- TOP TO VISIBLE _____
- EDGE TO VISIBLE _____
- CENTER HORIZONTALLY

GLAZING:

- BY TIGER DOOR
- BY OTHERS
- ACTIVE LEAF
- INACTIVE LEAF

VISION LIGHT

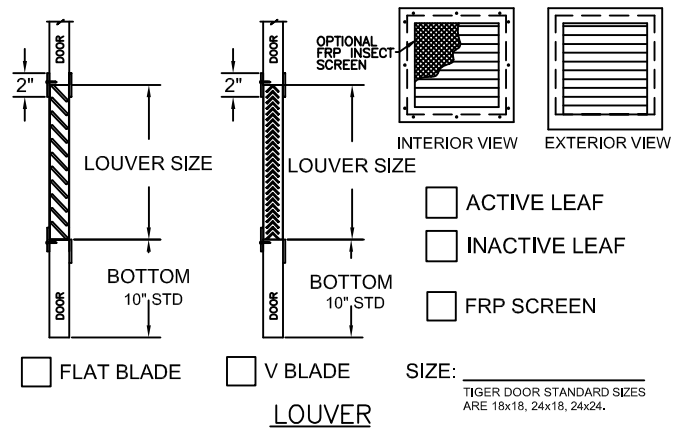

- FLAT BLADE
- V BLADE
- SIZE: _____
- ACTIVE LEAF
- INACTIVE LEAF
- FRP SCREEN

TIGER DOOR STANDARD SIZES ARE 18x18, 24x18, 24x24.

DOUBLE DOORS ONLY

CUSTOMER: _____

PROJECT: _____

DOOR MARK: _____

CUSTOMER NOTES: _____

www.tigerdoor.com



1181 Garden Street
Greensburg, PA 15601
PH. 888-891-4416
PH. 724-834-7300
FAX 724-830-2871